


Packing Contents

Product Introduction

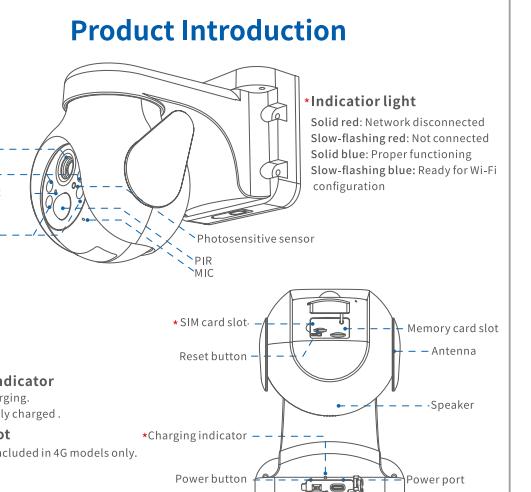

Power Connection

- Before Use: Please fully charge the device to avoid any power-related issues.
- Power On: Turn the power switch to the "ON" position. The indicator light on the front will light up, and a voice prompt will confirm the device is active.
- Charging: Use the power adapter to charge the device. Alternatively, connect the solar panel for charging.

Charging with power adapter



Charging with solar panel



Quick Setup

Step 1: Download and Install the App

Scan the QR code below or search for "Noorio Plus" in major app stores. Download and install the app.



4


Step 2: Register and Log In

Open the app, tap "Register" and complete the registration process. If already registered, log in directly.

5

Wi-Fi Configuration with QR Code Step 1 (Wi-Fi Models Only)


- Power On: Power on the camera, wait for the voice prompt or the indicator light to flash.
- Add Device: Enter the app's main screen, click "+", select "Add Device", scan the QR code on the camera, and connect to the "Wi-Fi Configuration (QR Code)".



6

Wi-Fi Configuration with QR Code Step 2 (Wi-Fi Models Only)

- Guided Setup: Follow the app wizard for "Please power on the camera" and "Wait for the beep from the camera".
- Add Device: Enter the app's main screen, tap "+", select "Add Device", scan the QR code on the camera, and connect to the "Wi-Fi Configuration (QR Code)".



7


Wi-Fi Configuration with QR Code Step 3 (Wi-Fi Models Only)

- Wi-Fi Selection: Select Wi-Fi, enter the Wi-Fi password.
- Pairing: Hold the phone around 15-20 cm from the camera and point the QR code to its lens, wait 15-20 seconds for pairing. Listen for the prompt, and the indicator light will stop flashing, indicating successful pairing.



8


封面

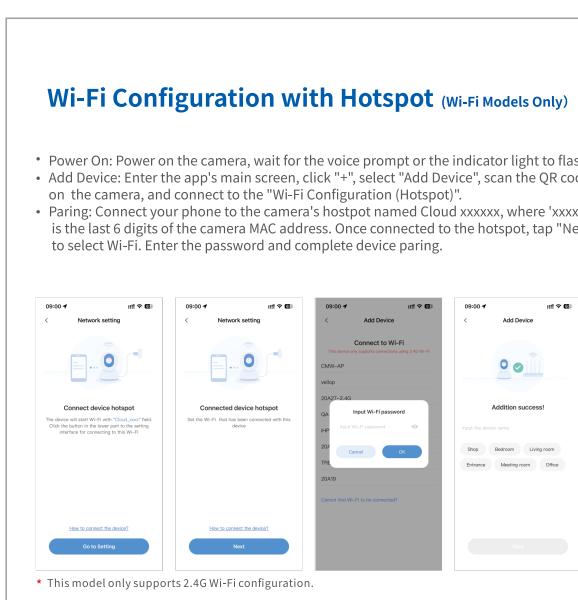

Wi-Fi Configuration with Hotspot (Wi-Fi Models Only)

- Power On: Power on the camera, wait for the voice prompt or the indicator light to flash.
- Add Device: Enter the app's main screen, click "+", select "Add Device", scan the QR code on the camera, and connect to the "Wi-Fi Configuration (Hotspot)".
- Pairing: Connect your phone to the camera's hotspot named Cloud xxxxxx, where "xxxxx" is the last 6 digits of the camera MAC address. Once connected to the hotspot, tap "Next" to select Wi-Fi. Enter the password and complete device pairing.


8

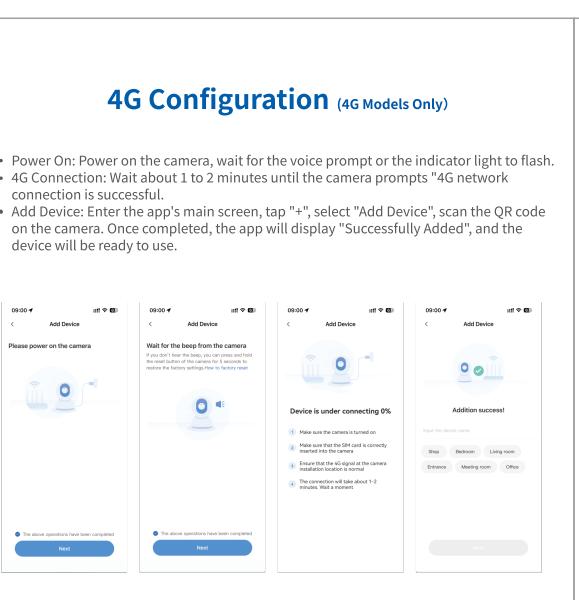

4G Configuration (4G Models Only)


- Power On: Power on the camera, wait for the voice prompt or the indicator light to flash.
- 4G Connection: Wait about 1 to 2 minutes until the camera prompts "4G network connection is successful".
- Add Device: Enter the app's main screen, tap "+", select "Add Device", scan the QR code on the camera. Once completed, the app will display "Successfully Added", and the device will be ready to use.

9

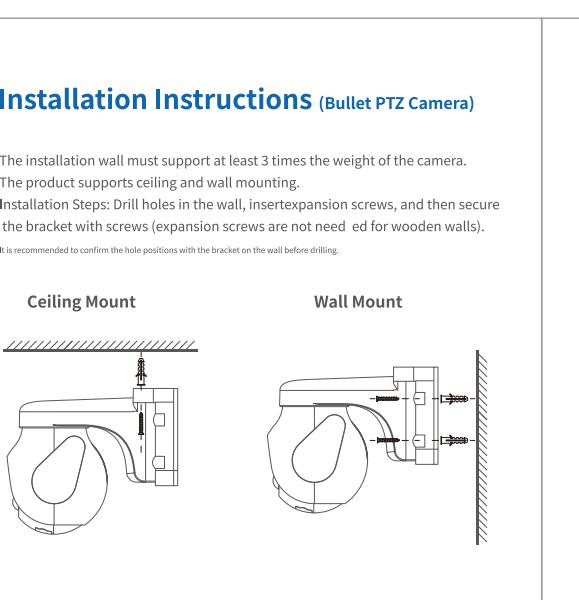


Installation Instructions (Bullet PTZ Camera)

- The installation wall must support at least 3 times the weight of the camera.
- The product supports ceiling and wall mounting.
- Installation Steps: Drill holes in the wall, insert expansion screws, and then secure the bracket with screws (expansion screws are not needed for wooden walls).
- It is recommended to confirm the hole positions with the bracket on the wall before drilling.






10

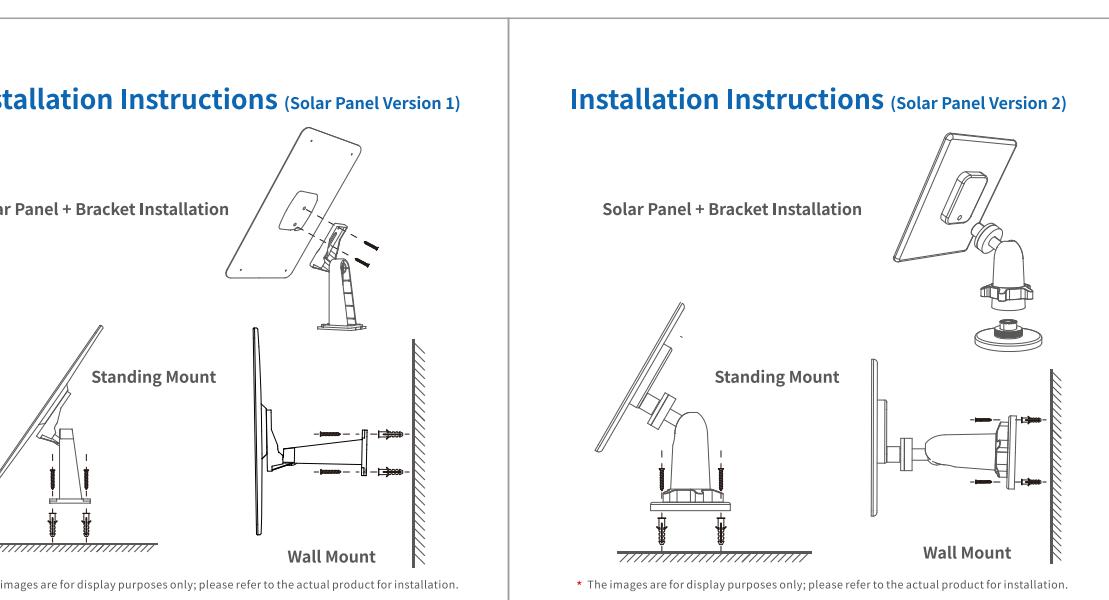


Installation Instructions (Solar Panel Version 1)

Solar Panel + Bracket Installation


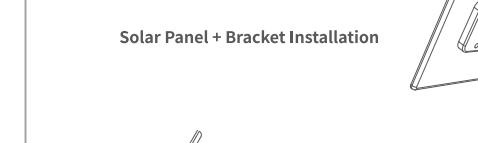



11

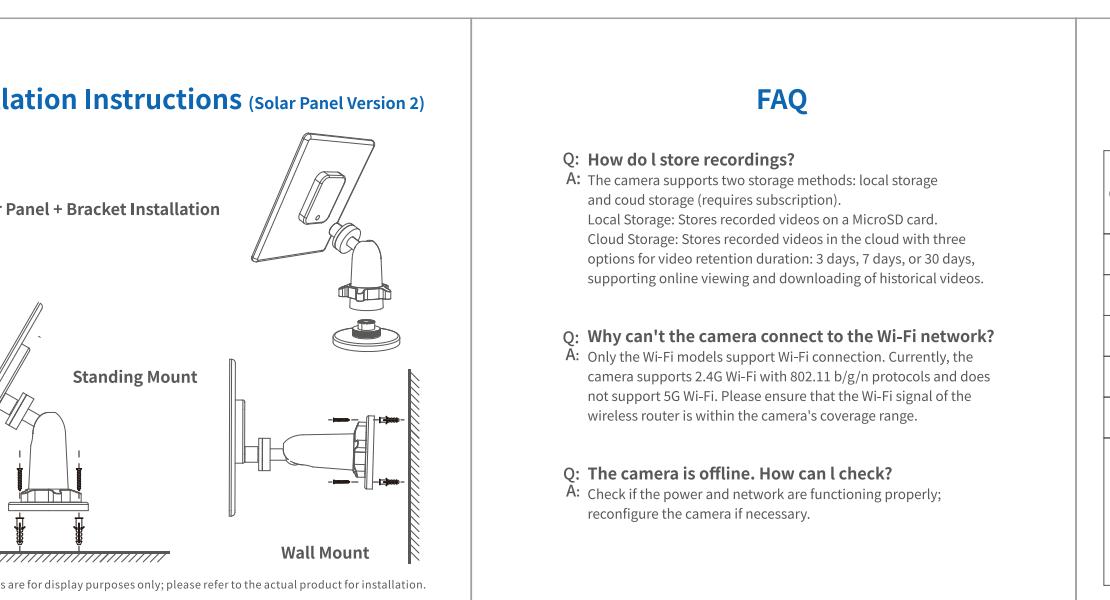


Installation Instructions (Solar Panel Version 2)

Solar Panel + Bracket Installation



12

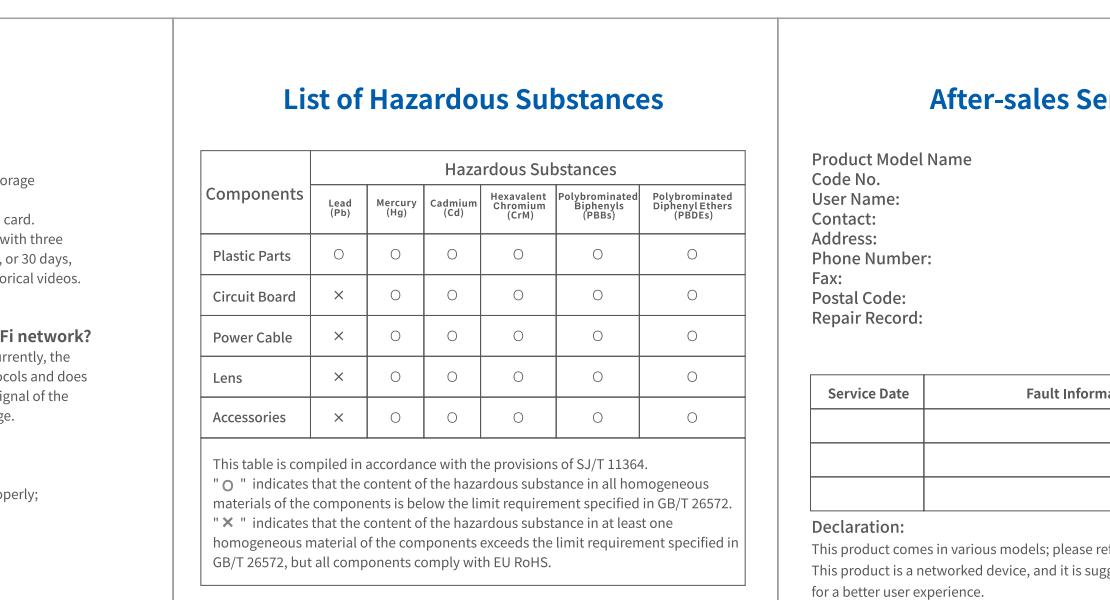

FAQ

Q: How do I store recordings?
A: The camera supports two storage methods: local storage and cloud storage (requires subscription). Local Storage: Stores recorded videos on a MicroSD card. Cloud Storage: Stores recorded videos in the cloud with three options for video retention duration: 3 days, 7 days, or 30 days, supporting online viewing and downloading of historical videos.

Q: Why can't the camera connect to the Wi-Fi network?
A: Only the Wi-Fi models support Wi-Fi connection. Currently, the camera supports 2.4G Wi-Fi with 802.11 b/g protocols and does not support 5G Wi-Fi. Please ensure that the Wi-Fi signal of the wireless router is within the camera's coverage range.


Q: The camera is offline. How can I check?
A: Check if the power and network are functioning properly; reconfigure the camera if necessary.

List of Hazardous Substances

| Components | Hazardous Substances | | | | | |
|---------------|----------------------|--------------|--------------|----------------------------|---------------------------------------|---------------------------------------|
| | Lead (Pb) | Mercury (Hg) | Cadmium (Cd) | Hexavalent Chromium (Cr6+) | Polybrominated Diphenyl Ethers (PBDE) | Polybrominated Diphenyl Ethers (PBDE) |
| Plastic Parts | ○ | ○ | ○ | ○ | ○ | ○ |
| Circuit Board | × | ○ | ○ | ○ | ○ | ○ |
| Power Cable | × | ○ | ○ | ○ | ○ | ○ |
| Lens | × | ○ | ○ | ○ | ○ | ○ |
| Accessories | × | ○ | ○ | ○ | ○ | ○ |


This table is compiled in accordance with the provisions of SJ/T 11364.
"○" indicates that the content of the hazardous substance in all homogeneous materials of the components is below the limit requirement specified in GB/T 26572.
"×" indicates that the content of the hazardous substance in at least one homogeneous material of the components exceeds the limit requirement specified in GB/T 26572, but all components comply with EU RoHS.

14

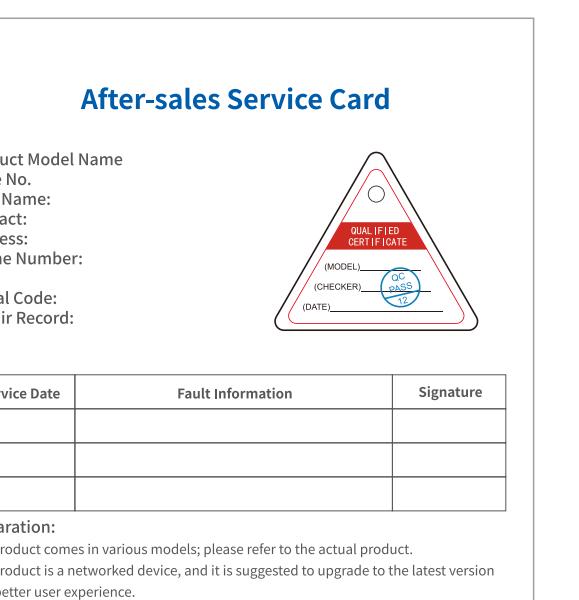


After-sales Service Card

Product Model Name:
Code No.:
User Name:
Contact:
Address:
Phone Number:
Fax:
Postal Code:
Repair Record:

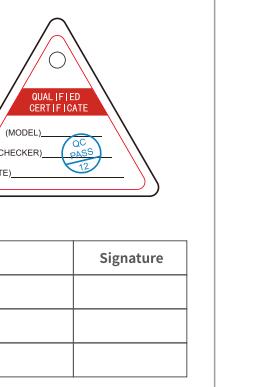

Declaration:
This product comes in various models; please refer to the actual product.
This product is a networked device, and it is suggested to upgrade to the latest version for a better user experience.



成品效果图

| | |
|---------------|----------------------|
| Name(物料名称) | Noorio-BD200_说明书 |
| 物料编码 | |
| Material(材质) | 128g铜版纸 |
| Dimension(尺寸) | 80x80mm |
| Printing(印刷) | 双面印刷 |
| Finish(表面工艺) | |
| Note(备注) | 16 P, 7折页, 装订方式: 风琴折 |

Noorio

| | |
|----|------------|
| 设计 | 戚炳炳 |
| 版本 | V1.0 |
| 时间 | 2024.12.06 |